

RX1000



FEATURES

- Built-in NFC for reading and setting parameters through mobile app
- Real-time monitoring of system condition
- Built-in self test and soft recovery watchdog
- Internal relay failure (IRF) alarm for system abnormalities
- Time-stamp event record of power failure and setting changes up to 120 events.
- Time-stamp record of up to 30 faults and 30 pickups
- Three-phase, three-stage setting for phase overcurrent
- Two-stage setting for earth fault
- 5 selectable IDMT and definite times
- Thermal overload protection
- Cold load pickup protection
- Circuit breaker failure protection
- Selectable fundamental or true RMS measurement
- Selectable 50 or 60 Hz frequency
- 2 Programmable LEDs linked to alarm
- Programmable contact outputs
- Complies with IEC 60255 standard
- ANSI code: 50G, 50P, 50N, 51G, 51P, 51N, CLP, 50BF, 49RMS

SPECIFICATIONS

RATING

Rate Current In	: 5A
Frequency	: 50 or 60Hz
Burden	: <0.3VA at In
Thermal Withstand	: 4 x In Continuous

AUXILIARY SUPPLY

Supply Voltage	: 198 ~ 265VAC
Supply Frequency	: 50 or 60Hz
VA Rating	: 3VA max

ACCURACY

Protection Thresholds	: $\pm 3\%$ or $\pm 20\text{mA}$ whichever is greater
Time Delay	: $\pm 3\%$ or $\pm 40\text{ms}$ whichever is greater

NFC COMMUNICATION

Operation System	: Android OS and IOS
App Name	: MikroNFC



SETTING RANGES

(i) Overcurrent Setting

3I>	: 0.5A -12.5A(10% -250%), *(Variable steps 1)
ktI>	: 0.01 -1.00, *(Variable steps 2)
tI>	: 0.03 -100s, *(Variable steps 2)
3I>Delay Type	: DT, NI3/10, NI1.3/10, VI, LI, EI
3I>>	: OFF/0.5 -100A(10% -2000%), *(Variable steps 1)
tI>>	: 0.03 -100s, *(Variable steps 2)
3I>>>	: OFF/0.5 -100A(10% -2000%), *(Variable steps 1)
tI>>>	: 0.03 -100s, *(Variable steps 2)

(ii) Earth-fault Setting

Io>	: 0.1A -10.0A(2% -200%), *(Variable steps 1)
ktIo>	: 0.01 -1.00, *(Variable steps 2)
tIo>	: 0.03 -100s, *(Variable steps 2)
Io>Delay Type	: DT, NI3/10, NI1.3/10, VI, LI, EI
Io>>	: OFF/0.1 -50A(2% -1000%), *(Variable steps 1)
tIo>>	: 0.03 -100s, *(Variable steps 2)

(iii) Thermal Overload Setting

$\Theta>$	: OFF/0.5A -10.0A(10% -200%), (step 0.05A)
T Θ	: 1 to 200 minutes, (step 1min)
ktI $\Theta>$	: 1.00 -1.50, (step 0.01)
Θ Trip	: 50 to 200%, (step 1%)
Θ Alarm	: 50 to 200%, (step 1%)

OUTPUT CONTACTS

Rated Voltage	: 250VAC
Continuous Carry	: 5A (Cos ϕ =1.0)
Expected Electrical Life	: 10^5 operations
Expected Mechanical Life	: 5×10^6 operations
No of Output Contact	: 2

ENVIRONMENTAL CONDITIONS

Operating Temperature	: -10°C to 55°C
Humidity	: 5% to 95%, non-condensing

MECHANICAL


Mounting	: Panel mounting
Dimension (mm)	: 96(w) x 96(h) x 90(d)
Enclosure protection	: IP54 at the panel IP20 at the body
Approximate weight	: 0.80kg

*Variable Steps 1: step 0.05 (<10), step 0.1 (<100)


*Variable Steps 2: step 0.01 (<1), step 0.1 (<10), step 0.5 (<100)

IDMT CURVE


NORMAL INVERSE 3/10

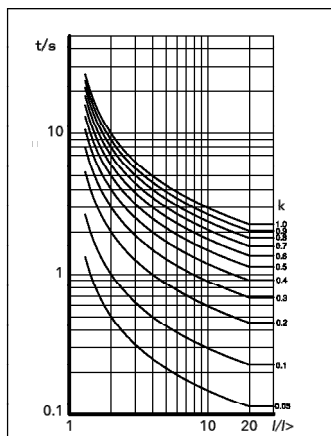


NORMAL INVERSE 1.3/10

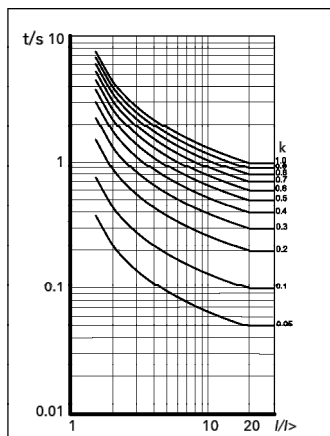


VERY INVERSE

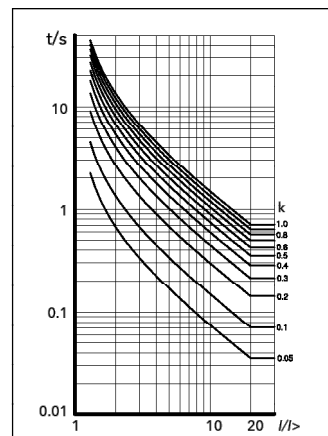


LONG-TIME INVERSE

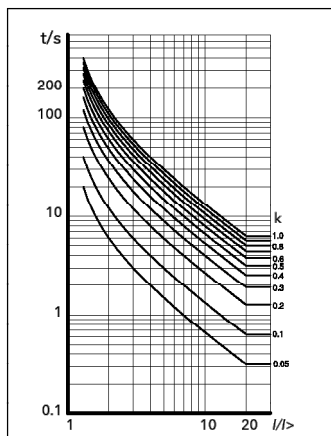


EXTREMELY INVERSE

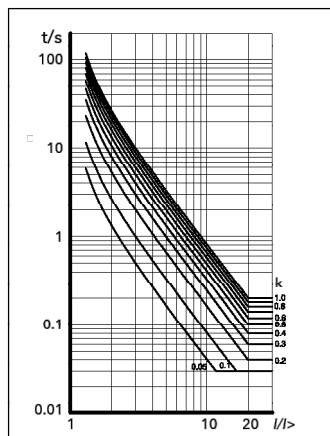

TYPICAL APPLICATION DIAGRAM

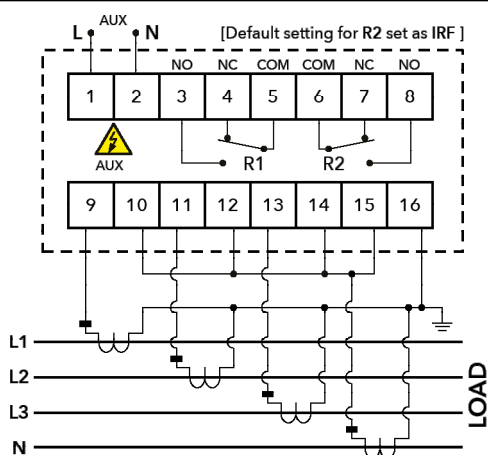

CASE DIMENSION

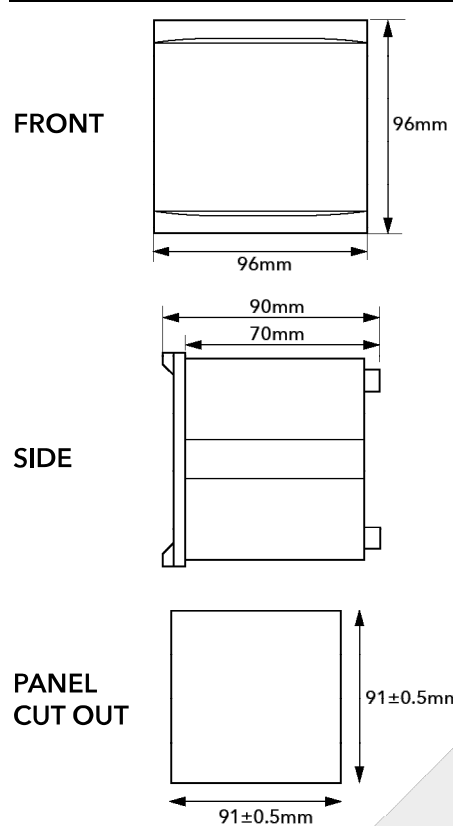

ORDERING INFORMATION

MODEL	DESCRIPTION
RX1000-230A	Auxiliary Voltage 198~265 V AC, frequency 50 or 60Hz